




TILE LEVELING SYSTEM

- Consistently spaces tile and removes lippage
- Great for both wall and floor tiles up to 11 mm thick
- After thinset has dried, use a rubber mallet to hit the system in line with the grout joint
- Wedges are reusable
- For tight, level tiles, use the PLS Pliers (*BWTLS3P*)



Comes in a convenient, resealable bag

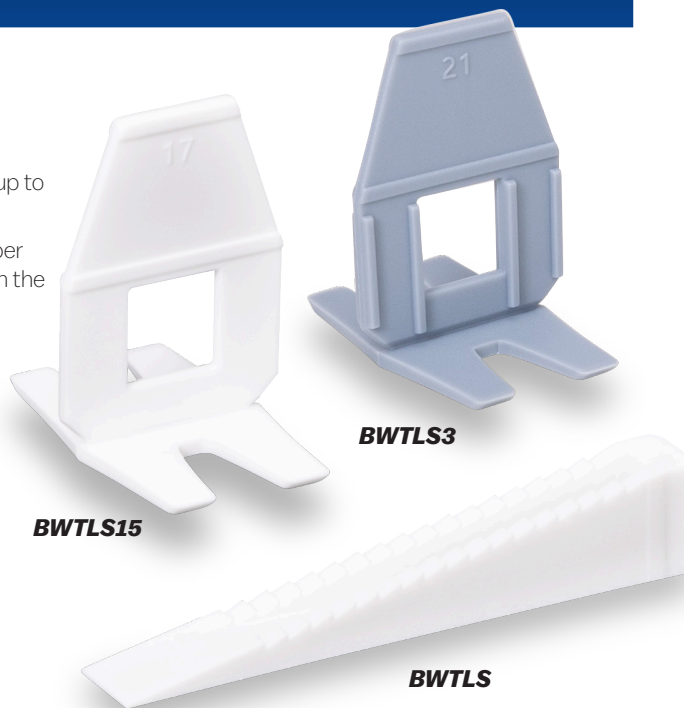

1

Place spacer



2

Insert wedge



3

Tighten & let mortar dry



4

Remove

EDI	Part#	Description	Size-in	Size-mm	Qty	Inner/Outer
33054	BWTL3	PLS Straight Spacer Bases	1/8	3	100	1/10
33056	BWTL3	PLS Straight Spacer Bases	1/8	3	100	1/10
33058	BWTL15	PLS Straight Spacer Bases	1/16	1.5	100	1/10

Compatible PLS Accessories:



Anti-Scratch Disk to avoid scuffing
DSPIN100 | EDI-41796



PLS Pliers for tightening
BWTLS3P | EDI-33060



BARWALT
A MARSHALLTOWN® BRAND