




TILE LEVELING SYSTEM

- Consistently spaces tile and removes lippage
- Great for both wall and floor tiles up to 11 mm thick
- After thinset has dried, use a rubber mallet to hit the system in line with the grout joint
- Wedges are reusable
- For tight, level tiles, use the PLS Pliers (**BWTLSP**)



**100 packs sold in resealable bag,
bulk packs sold in boxes**

BWTLS15

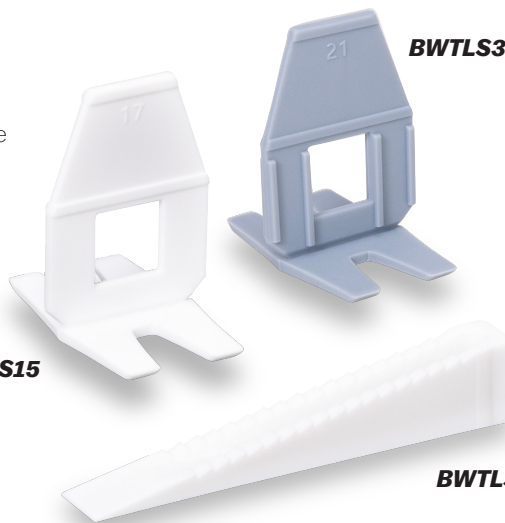

BWTLS

EDI	Part#	Description	Size-in	Size-mm	Qty	Inner/Outer
33054	BWTLS	PLS Wedges	N/A	N/A	100	1/10
33056	BWTLS3	PLS Straight Spacer Bases	1/8	3	100	1/10
33058	BWTLS15	PLS Straight Spacer Bases	1/16	1.5	100	1/10
41821	WPLS500	PLS Wedges - Bulk Box	N/A	N/A	500	1/1
41823	3PLS1000	PLS Straight Spacer Bases - Bulk Box	1/8	3	1000	1/1
41825	15PLS1000	PLS Straight Spacer Bases - Bulk Box	1/16	1.5	1000	1/1

Compatible PLS Accessories:



**Anti-Scratch Disk to avoid scuffing
DSPIN100 | EDI-41796**



**PLS Pliers for tightening
BWTLSP | EDI-33060**



1

Place spacer



2

Insert wedge



3

Tighten & let mortar dry



4

Remove



BARWALT®
A MARSHALLTOWN® BRAND