

TILE LEVELING SYSTEM

FAST⁺cap[™]

SPACER BASES

**NEW &
IMPROVED!**

**SPACER BASES
STYLES:**


- Feature an improved construction with thinner feet for more clearance under tiles
- Designed to break off easier
- Straight Spacer Bases are used for all wall edges and can be used for both staggered and square layouts
- Use T Spacer Bases in staggered intersections, using $\frac{2}{3}$ less
- Use + Spacer Bases in square intersections, using $\frac{3}{4}$ less
- Ratchet Caps sold separately
- U.S. Patent No. USD962038, USD956519, USD956520



50 Packs


EDI	Part#	Description
29001	BASE116STR	$\frac{1}{16}$ " (1.5mm) FASTCAP Straight Spacer Bases, Bag of 50
29003	BASE18STR	$\frac{1}{8}$ " (3mm) FASTCAP Straight Spacer Bases, Bag of 50
29006	BASE18+	$\frac{1}{8}$ " (3mm) FASTCAP Plus (+) Spacer Bases, Bag of 50
29009	BASE18T	$\frac{1}{8}$ " (3mm) FASTCAP T Spacer Bases, Bag of 50

**$\frac{1}{16}$ "
(1.5mm)**



Straight

**$\frac{1}{8}$ "
(3mm)**

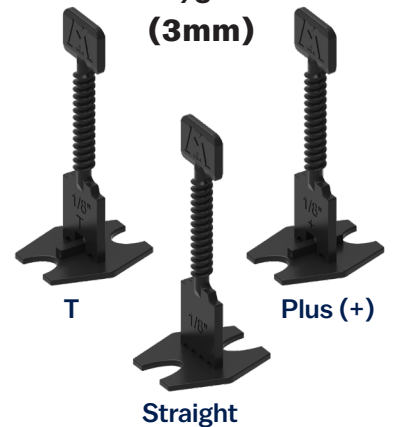

T

Plus (+)

Straight


HOW MANY DO I NEED?

PICK YOUR PATTERN




Straight Spacer Bases are used at wall edges and can be used for traditional and intersection method layouts.


TRADITIONAL & INTERSECTION METHODS - Using all Straight Spacer Bases




Straight Spacers: 3.5/ft² (38m²)
Ratchet Caps: 3.5/ft² (38m²)



Straight Spacers: 3/ft² (32.3m²)
Ratchet Caps: 3/ft² (32.3m²)



Straight Spacers: 6/ft² (64.5m²)
Ratchet Caps: 6/ft² (64.5m²)




Straight Spacers: 5.5/ft² (59.1m²)
Ratchet Caps: 5.5/ft² (59.1m²)




Straight Spacer Bases are used at wall edges, and **T Spacer Bases** are used for T intersection method layouts.


INTERSECTION METHOD - Using T and Straight Spacer Bases




T Spacers: 1.5/ft² (16.1m²)
Straight Spacers: 0.5/ft² (5.4m²)
Ratchet Caps: 2/ft² (21.5m²)



T Spacers: 0.75/ft² (8.1m²)
Straight Spacers: 0.5/ft² (5.4m²)
Ratchet Caps: 1.25/ft² (13.4m²)



T Spacers: 1.5/ft² (16.1m²)
Straight Spacers: 0.5/ft² (5.4m²)
Ratchet Caps: 2/ft² (21.5m²)




T Spacers: 1.25/ft² (13.4m²)
Straight Spacers: 1.75/ft² (18.8m²)
Ratchet Caps: 3/ft² (32.3m²)




Straight Spacer Bases are used at wall edges, and **+ Spacer Bases** are used for + intersection method layouts.


INTERSECTION METHOD - Using + and Straight Spacer Bases




+ Spacers: 1/ft² (10.8m²)
Straight Spacers: 0.5/ft² (5.4m²)
Ratchet Caps: 1.5/ft² (16.1m²)



+ Spacers: 0.4/ft² (4.3m²)
Straight Spacers: 0.8/ft² (8.6m²)
Ratchet Caps: 1.2/ft² (12.9m²)



+ Spacers: 0.75/ft² (8.1m²)
Straight Spacers: 1.25/ft² (13.4m²)
Ratchet Caps: 2/ft² (21.5m²)



+ Spacers: 1.75/ft² (18.8m²)
Straight Spacers: 0.5/ft² (5.4m²)
Ratchet Caps: 2.25/ft² (24.2m²)